


Step 1: Gather Materials



Step 2: Trace Pattern Pieces onto Fusible Webbing

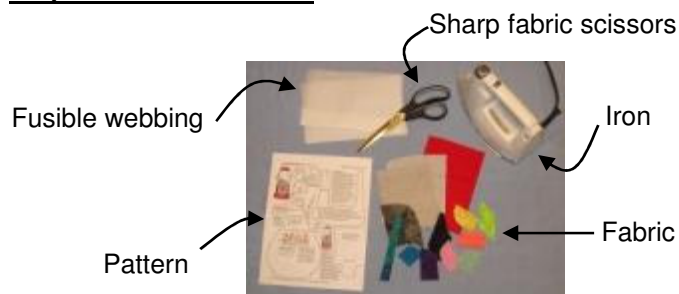

Use a pencil to trace the pattern pieces onto the paper side of the fusible webbing. This will be the smooth side, the rough side is the glued side.

All pattern pieces have been traced onto the fusible webbing.



Step 3: Cut Fusible Webbing Pieces Apart



Cut apart the traced pieces leaving 1/8" to 1/4" allowance around the pencil line.

All pattern pieces have been cut apart with allowances.



Step 4: Iron Fusible Webbing Pattern Pieces onto Fabric



Iron fusible webbing pieces glue side down onto the wrong side of the fabric.

All pieces ironed onto fabric.



Step 5: Cut Out Pieces on Pattern Lines



Cut out pieces on pattern lines with sharp fabric cutting scissors.

All pieces cut out.



Step 6 Peel Paper Backing off Fabric



Peel paper backing off the fabric pieces.

All pieces have paper peeled off. →



Step 7 Place Pieces According to Pattern Picture



Using the pattern as a guide, loosely assemble all fabric pieces glue side down on the right side of the backing fabric.

Step 8 Iron Pieces into Place



Iron all pieces, being careful not to move any pieces out of place. Do not use steam.

Finished appliqué block. →



Step 9 Sew Edges, Add Embellishments



Sew down edges with machine or by hand, depending on preference. Add embellishments as desired – Penny used a glue gun to add buttons to the gumballs in this pattern.